


Presola[®] String Inverter

Photovoltaic Inverter 1.5-25KW Series

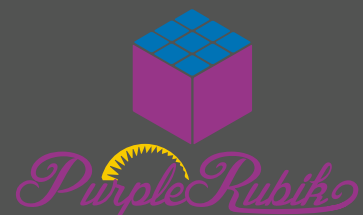

PurpleRubik New Energy Technology Co., Ltd.

Mercury Series Single-phase String Inverters


PM- I 500 / 2000 / 2500 / 3000TL-SS

- ◇ Exquisite
- ◇ Trustworthy
- ◇ Intelligent
- ◇ Profitable



FEATURES	ADVANTAGES	BENEFITS
Components from world class suppliers	Longer MTBF (Mean Time Between Failures)	More electricity output Less down time
Automotive class PCB technology	Higher quality guaranteed	Reliable and stable under severe conditions
Optimized thermal design	Lower heat generation Faster heat dissipation	Lower internal operation temperature Longer component life
Silicone Rubber Gaskets & Seals	High performance sealing	Reliable and stable under severe conditions
Integrated enclosure design	High performance sealing possible Less chance of moisture invasion	Suitable for humid operation environments
Integrated air valve	Reduction of condensation	Operable in more applications: fishing ponds, agricultural area, greenhouses, coastal areas
1000 hours of neutral salt spray testing	Suitable for harsh environments	Easy installation and maintenance possible
User friendly interface	Easy to operate	Data analysis Less maintenance
Intelligent monitoring system	Easy to manage and maintain	

CIRCUIT DIAGRAM

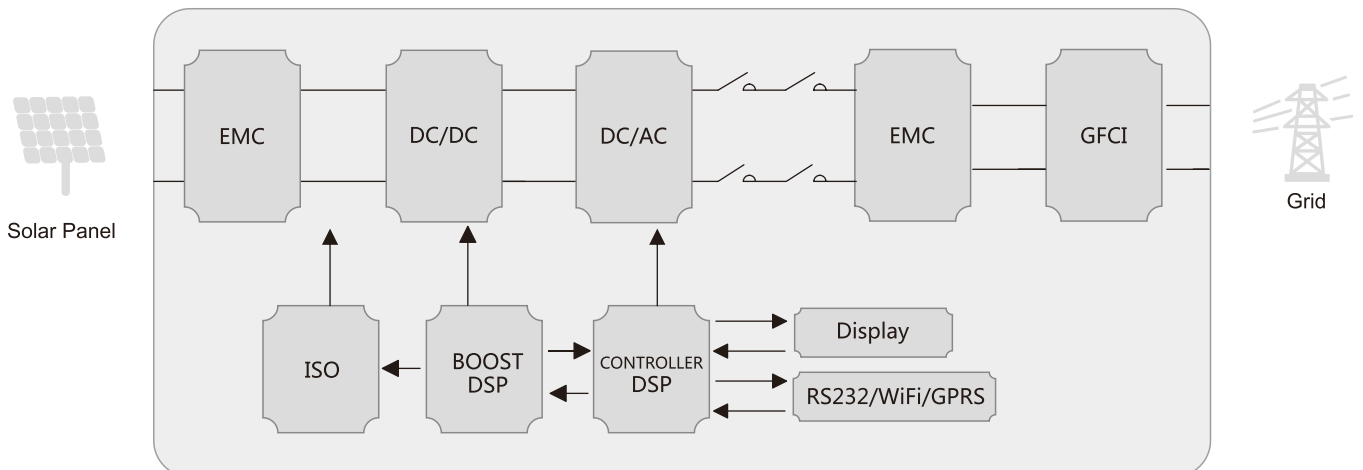

Mercury Series Single-Phase String Inverters

PM-I 500 / 2000 / 2500 / 3000TL-SS

TECHNICAL DATA

MODEL	PM-1500TL-SS	PM-2000TL-SS	PM-2500TL-SS	PM-3000TL-SS
Input (DC)				
Max. DC Power	1600W	2100W	2600W	3200W
Max. Input Voltage	500V	500V	500V	500V
MPP Operation Voltage Range/Nominal Input Voltage	100V-450V/380V	100V-450V/380V	100V-450V/380V	100V-450V/380V
Startup Voltage	80V	80V	80V	80V
Max. Input Current per String	11.5A	12.5A	14A	14A
Short-circuit Current	13.5A	14.5A	16A	16A
Number of Independent MPP Inputs	1	1	1	1
Maximum inverter Backfeed Current to Array	0A	0A	0A	0A
Output (AC)				
Rated Power	1500W	2000W	2500W	3000W
Max. Apparent AC Power	1500VA	2000VA	2500VA	3000VA
Nominal AC Voltage	220V/230V/240V	220V/230V/240V	220V/230V/240V	220V/230V/240V
Nominal AC Voltage Range	180V-277V	180V-277V	180V-277V	180V-277V
AC Power Frequency	50Hz/60Hz	50Hz/60Hz	50Hz/60Hz	50Hz/60Hz
Max. Output Current	6.8A	9.1A	11.4A	13.6A
Power Factor	0.8 ind...0.8 cap	0.8 ind...0.8 cap	0.8 ind...0.8 cap	0.8 ind...0.8 cap
Total Harmonic Distortion (THD)	<3%	<3%	<3%	<3%
Feed-in Phases/Connection Phases	L+N+PE	L+N+PE	L+N+PE	L+N+PE
Inrush Current(peak and duration)	49.6A peak@6.72ms	51.2A peak@6.51ms	52.0A peak@6.84ms	59.2A peak@6.88ms
Maximum Output Fault Current	7.8A	10.1A	12.4A	14.6A
Maximum Output Over Current Protection	8.8A	11.8A	14.8A	17.7A
Efficiency				
Max. Efficiency	96.8%	97.1%	97.2%	97.2%
European Weighted Efficiency	96.0%	96.2%	96.4%	96.4%
Protective Devices				
DC Reverse Polarity Protection	Yes			
DC Switch	Optional			
AC Over Current Protection	Yes			
Ground Fault Monitoring	Yes			
Grid Monitoring	Yes			
Residual Current Monitoring Unit	Yes			
General Data				
Dimensions (W/H /D)	326*349*135			
Weight	10.5kg			
Operating Temperature Range	-25°C...+60°C			
Noise Emission (typical)	<=25dB(A)			
Max. Operating Altitude	>2000m derating			
Standby Losses	<0.5W			
Topology	Transformerless			
Cooling Concept	Natural Convection			
Degree of Protection (according to IEC 60529)	IP65			
Relative Humidity	0-95%, no condensation			
DC Connection Type	MC/Amphenol/Phoenix			
AC Connection Type	Plug-in connector			
Display	LCD Light			
Interface	Rs232 (WiFi/GPRS Optional)			
Warranty	5/10 years(Optional)			
Certificates and approvals	IEC62109-1/-2; EN61000-6-2; EN61000-6-3; CE; AS4777.2-2015; VDE4105; EN50438; CQC;			